Department of Civil and Environmental Engineering,

Spring Semester, 2023

ENCE 353 Midterm 2, Open Notes and Open Book

Name:

E-mail (print neatly!):

Exam Format and Grading. This take home midterm exam is open notes and open book. You need to comply with the university regulations for academic integrity.

There are three questions. Partial credit will be given for partially correct answers, so please show all your working.

Please see the class web page for instructions on how to submit your exam paper.

Question	Points	Score
1	15	
2	10	
3	15	
Total	40	

Question 1: 15 points

Moment-Area Method. Figure 1 is a front elevation view of a cantilevered beam carrying a single point load P. EI is constant along the beam structure A-B-C-D.

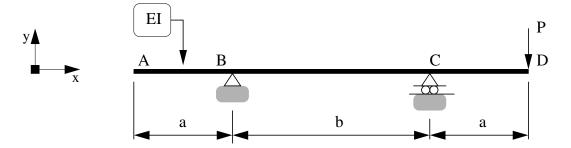


Figure 1: Cantilevered beam carrying a single applied load P.

[1a] (2 pts) Draw and label the M/EI diagram.

[1b] (2 pts) Draw and label the moment area analysis diagram (i.e., with rotations, tangents, displacements, etc) for this problem.

[1c] (3 pts) Use the method of moment area to show that the anticlockwise rotation of the beam at B is:

$$\theta_B = \frac{Pab}{6EI} \tag{1}$$

and the clockwise rotation of the beam at C is:

$$\theta_C = \frac{Pab}{3EI}.$$
(2)

[1d] (3 pts) Use the method of **moment area** to show that the vertical deflection of the beam at points A and D (measured downwards) is:

$$y_A = \frac{Pa^2b}{6EI} \tag{3}$$

and

$$y_D = \frac{Pa^2}{3EI} \left(a+b\right). \tag{4}$$

[1e] (5 pts) Show – do not simply assume – that the maximum upwards deflection of the beam occurs at a distance $b/\sqrt{3}$ from B, and that its value is:

$$y_{\text{maximum upward}} = \frac{Pab^2}{9\sqrt{3}EI}.$$
 (5)

Question 2: 10 points

Derive Elastic Curve for Beam Deflection. Figure 2 is a front elevation view of a cantilevered beam carrying a single point load P. EI is constant along the beam structure A-B-C-D.

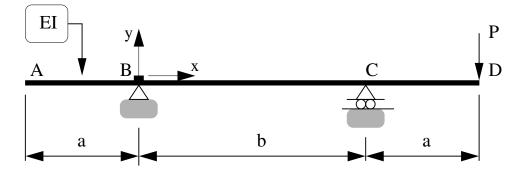


Figure 2: Cantilevered beam carrying a single applied load P.

[2a] (5 pts) Starting from the differential equation,

$$\frac{d^2y}{dx^2} = \left[\frac{-M(x)}{EI}\right],\tag{6}$$

(notice the minus sign on M(x)) and appropriate boundary conditions, show that that vertical beam deflection along the beam segment B-C is:

$$y(x) = \frac{Pa}{6EIb} (b^2 - x^2) x.$$
 (7)

[2b] (5 pts) Hence (i.e., using your results from part [2a] as a starting point), show that the maximum upwards deflection of the beam occurs at a distance $b/\sqrt{3}$ from B, and that its value is:

$$y_{\text{maximum upward}} = \frac{Pab^2}{9\sqrt{3}EI}.$$
 (8)

Question 3: 15 points

Principle of Superposition, Moment Area, Compatibility of Displacements. Figure 3 is a front elevation view of a multi-span beam structure that carries uniform load w_o (N/m) along beam segment B-C. EI is constant along the beam structure A-B-C-D.

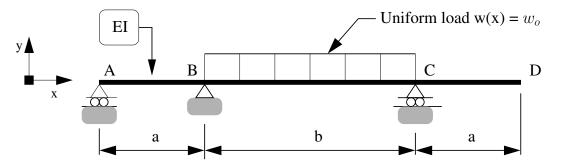


Figure 3: Multi-span beam carrying a uniform load on segment B-C.

[3a] (3 pts) Compute the degree of indeterminacy for this structure.

[3b] (5 pts) Draw and label a diagram indicating how the **principle of superposition** can be used to simplify the analysis of the multi-span beam structure.

[3c] (7 pts) Using the method of moment area or otherwise, compute the support reactions at supports A, B and C.

Check that you reaction forces are in equilibrium with the applied loads.