

Engineering Software Development

Mark A. Austin

University of Maryland

austin@umd.edu

ENCE 688P, Fall Semester 2020

February 5, 2021

Overview

- 1 Quick Review
- 2 Problem Solving with Computers
- 3 Abstractions for Modeling System Behavior
- 4 Interpreted and Compiled Languages
- 5 Implementation (Writing the Code)
- 6 Program Development with Python and Java

Part 2

Quick Review

Compiled and Interpreted


Modern Interpreter Systems

Transform source code into a lower-level intermediate format.
Interpreter then executes commands.

Compiled Code



Compiled and Interpreted Code



Examples: MATLAB, Java and Python.

Implementation

(Writing the Code)

Implementation

Writing the Program Source Code

When you write the source code for a computer program, all you are doing is using text to **fill-in the details** of **programming templates**.

Details of the syntax will vary from one language to another, e.g.,

Branching Construct in Java

Branching Construct in Python

```
=====
if ( i < 3 ) {
    .... do something ....
} else {
    .... do something else ....
}
=====
```

```
=====
if i < 3:
    .... do something ....
else:
    .... do something else ....
=====
```

Program Development with Python

A Little History

Origins of Python

The Python programming language was initially written by Guido van Rossum in the late 1980s and first released in the early '90s. Its design borrows features from C, C++, Smalltalk, etc.

The name Python comes from Monty Python's Flying Circus.



Version 0.9 was released in February 1991. Fast forward to 2020, and we are up to Version 3.8.

What is Python?

Features:

- Designed for quick-and-dirty scripts, reusable modules, very large systems.
- Object-oriented. Very well-designed. Well documented.
- Large library of standard modules and third-party modules.
- Works on Unix, Mac OS X and Windows.
- Python is both a compiled and interpreted language. Python source code is **compiled** into a **bytecode format**.
- Integration with external C and Java code (Jython).

What is Python?

Strengths of Python:

- Open source. Compared to C and Java, it's easy to learn.
- Provides an approximate **superset of MATLAB** functionality.
- Modern language with good support for object-oriented program development.

Third-Party Modules:

- NumPy is a language extension that **defines** the **numerical array** and **matrix type** and basic operations on them.
- SciPy uses numpy to do **advanced math**, signal processing, optimization, statistics, etc.
- Matplotlib provides easy-to-use **plotting Matlab-style**.

First Program: Evaluate and Plot Sigmoid Function

Problem Description

In neural network models, the sigmoid function:

$$\sigma(x) = \left[\frac{1}{1 + e^{-x}} \right]. \quad (1)$$

serves as an activation. Our first program evaluates and plots $\sigma(x)$ over the range $x \in [-10, 10]$.

Running the Program

From the terminal window, simply type:

```
prompt >> python3 TestSigmoidFunction.py
```

First Program: Evaluate and Plot Sigmoid Function

The Python interpreter/compiler will complain if one or more of the required packages (e.g., matplotlib) are missing.

Use pip to install missing Python Packages

The standard [package-management system](#) used to install and manage software packages written in Python is called [pip](#) (or maybe pip3).

Example: And installation is easy!

```
prompt >> pip3 install numpy
prompt >> pip3 install matplotlib
```

Program Source Code

```
1 # =====
2 # TestSigmoidFunction.py: Evaluate/plot sigmoid function.
3 #
4 # Written by: Mark Austin           September, 2020
5 # =====
6
7 import math
8 import matplotlib
9 import matplotlib.pyplot as plt
10 import numpy as np
11
12 # define sigmoid function ...
13
14 def sigmoid (x):
15     return 1/(1 + math.exp(-x))
16
17 # main method ...
18
19 def main():
20     print("--- Enter TestSigmoidFunction.main() ...");
21     print("--- =====");
22
23     # Part 1: Evaluate and print sigmoid function
24
25     xvalues = list( np.arange( -10.0, 10.0, 0.5 ) );
26     for x in xvalues:
27         print ("--- sigmoid({:6.2f}) --> {:14.10f}".format(x, sigmoid(x)));
28
29     # Part 2: Create list of sigmoid(x) values ...
```

Program Source Code

```
29     # Part 2: Create list of sigmoid(x) values ...
30
31     yvalues = []
32     for x in xvalues:
33         yvalues.append( sigmoid(x) );
34
35     # Part 3: Organize and display plot ...
36
37     fig, ax = plt.subplots()
38     ax.plot( xvalues, yvalues )
39     ax.set(xlabel='x', ylabel='sigmoid(x)',
40           title='Plot sigmoid(x) vs x')
41     ax.grid()
42
43     # display and save plot ...
44
45     plt.show()
46
47     fig.savefig("sigmoid-plot.jpg")
48
49     print("--- ===== ...");
50     print("--- Leave TestSigmoidFunction.main() ...");
51
52     # call the main method ...
53
54     main()
```

Textual Output


The abbreviated textual output is:

```
--- Enter TestSigmoidFunction.main()      ...
--- ===== ...
--- sigmoid(-10.00) -->  0.0000453979
--- sigmoid( -9.50) -->  0.0000748462
--- sigmoid( -9.00) -->  0.0001233946
--- sigmoid( -8.50) -->  0.0002034270
--- sigmoid( -8.00) -->  0.0003353501

... lines of output removed ...

--- sigmoid(  7.50) -->  0.9994472214
--- sigmoid(  8.00) -->  0.9996646499
--- sigmoid(  8.50) -->  0.9997965730
--- sigmoid(  9.00) -->  0.9998766054
--- sigmoid(  9.50) -->  0.9999251538
--- ===== ...
--- Leave TestSigmoidFunction.main()      ...
```


Graphical Output

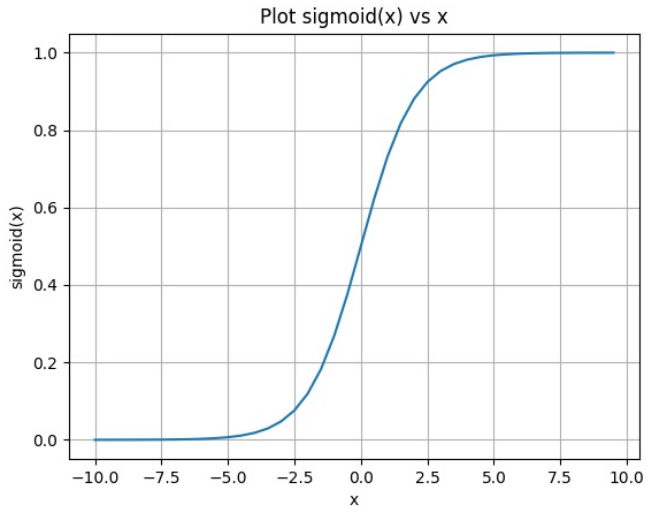


Program Development with Java


Flowchart for Software Development in Java

Step-by-Step Procedure:

- 1 Write, compile, fix, run, fix, run, validate → success!

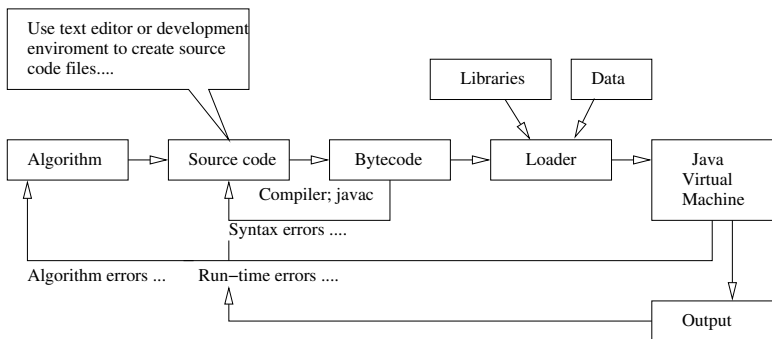

First steps: Fixing mistakes!

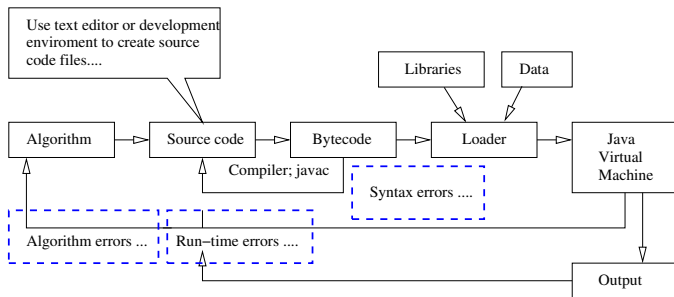

- 1 **Syntax Errors:** Check your typing ...
- 2 **Runtime Errors:** Program runs, but you have divide by zero and/or NaNs, etc.
- 3 **Algorithm Errors:** Does your program solve the right problem?

Program Development with Java

Strengths of Java:

- Java is both a compiled and interpreted language. Java source code is **compiled** into a **bytecode format**.
- Bytecodes are the lowest possible instruction format that remain **architecture neutral**. As a result, the bytecode can travel across the Internet and execute on any computer that has a Java Virtual Machine.
- Java is an **object-oriented language**. Implementation details are made efficient by exploiting the **relationship among objects**.
- Language provides very good **support for building large systems** that will work.

Program Development with Java

Weaknesses of Java:


- For the solution of small problems, **more lines of code** than with Python, Matlab.
- There's a **lot to learn**, especially if you want to become really skilled at developing software in Java.

Remark:

- If you want to become really skilled at developing software in Python, there's also a **lot to learn**.
- Sorry, there is no free lunch.

Integrated Development Environments for Java

Eclipse is an integrated software development tool (or IDE) for Java Software Development.

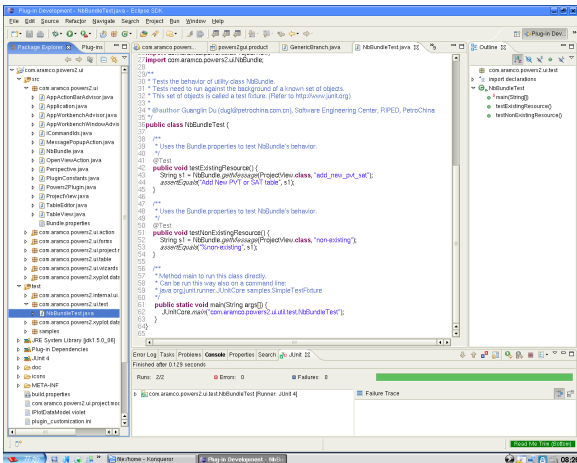

First Program: Evaluate and Plot Sigmoid Function

Problem Description

In neural network models, the sigmoid function:

$$\sigma(x) = \left[\frac{1}{1 + e^{-x}} \right]. \quad (2)$$

serves as an activation. Our first program evaluates and plots $\sigma(x)$ over the range $x \in [-10, 10]$.

Compiling the Program

From the terminal window, simply type:

```
prompt >> javac TestSigmoidFunction.java
```


First Program: Evaluate and Plot Sigmoid Function

The Java compiler will complain if one or more of the required packages (e.g., math library) are missing and/or syntax errors are detected.

The files before and after compilation are as follows:

Before Compilation

After Compilation

TestSigmoidFunction.java

TestSigmoidFunction.java
TestSigmoidFunction.class

Running the Program

```
prompt >> java TestSigmoidFunction
```


Program Source Code

```
29     // Method to compute sigmoid function ...
30
31     public static double sigmoid ( double x ) {
32         return 1/(1 + Math.exp(-x));
33     }
34 }
```

Points to note:

- The class TestSigmoidFunction must be located in a file called TestSigmoidFunction.java. During the compilation process, Java uses this **one-to-one association to find classes**.
- The program has **two user-defined methods**: main() and sigmoid().
- The statement **import java.lang.Math.*** makes all of the constants and methods in the math library available to this program. The program calls the exponential function.

A few more points:

- The keyword **public** is used in three places. It specifies that anyone can call the methods `main()` and `sigmoid()`, and that the class `TestSigmoidFunction` will also be public.
- The keyword **static** specifies that method can be called without first creating an object.
- The keyword **void** indicates that the method `main()` will not return anything.
- Variables must be declared before they can be used. Here, the variable `x` is a double precision floating point number.
- The method `sigmoid()` returns a double precision floating point number of type **double**.
- Java uses the dot (`.`) to indicate inside. The phrase **`System.out.printf()`** calls the **`printf()` method**, which is inside the **`out class`**, which is part of the **`System package`**.

Textual Output

The abbreviated textual output is:


```
--- Enter TestSigmoidFunction.main()    ...
--- =====                            ...
--- sigmoid(-10.00) --> 0.0000453979
--- sigmoid( -9.50) --> 0.0000748462
--- sigmoid( -9.00) --> 0.0001233946
--- sigmoid( -8.50) --> 0.0002034270
--- sigmoid( -8.00) --> 0.0003353501

... lines of output deleted ...

--- sigmoid( 7.50) --> 0.9994472214
--- sigmoid( 8.00) --> 0.9996646499
--- sigmoid( 8.50) --> 0.9997965730
--- sigmoid( 9.00) --> 0.9998766054
--- sigmoid( 9.50) --> 0.9999251538
--- sigmoid( 10.00) --> 0.9999546021
--- =====                            ...
--- Leave TestSigmoidFunction.main()    ...
```

Creating Charts in Java

Two approaches: JFreeChart and JavaFX.

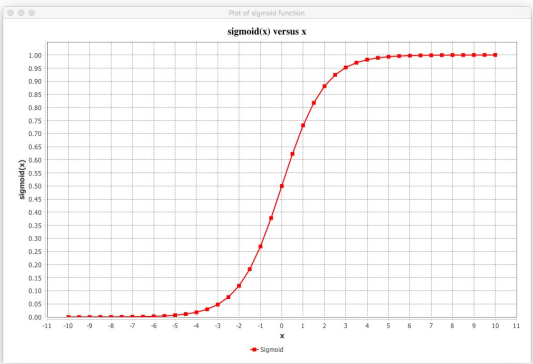

Source Code: See java-code-charts/src/ence688p/neural/