



Homework #3

Problem 1: For the three-pin arc structure shown below, the profile is given by $y = \frac{4f}{l^2} x(l - x)$, where $f = 4$ m and $l = 16$ m.

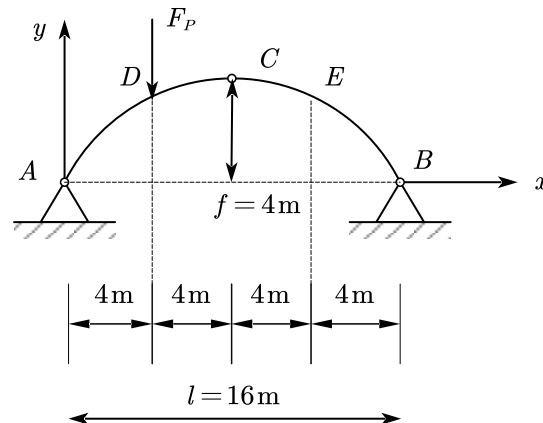

- Calculate the reactions at A and B;
- Calculate the internal forces at point E (i.e., axial force F_N , shear force F_Q and bending moment M);
- Draw the moment diagram.
- if $f = 8$ m, redo the calculation (a), (b), and (c).

Problem 2 The cable structure shown below carries a triangular load that is zero at the left-hand support and linearly increases to w_0 N/m at the right-hand support.

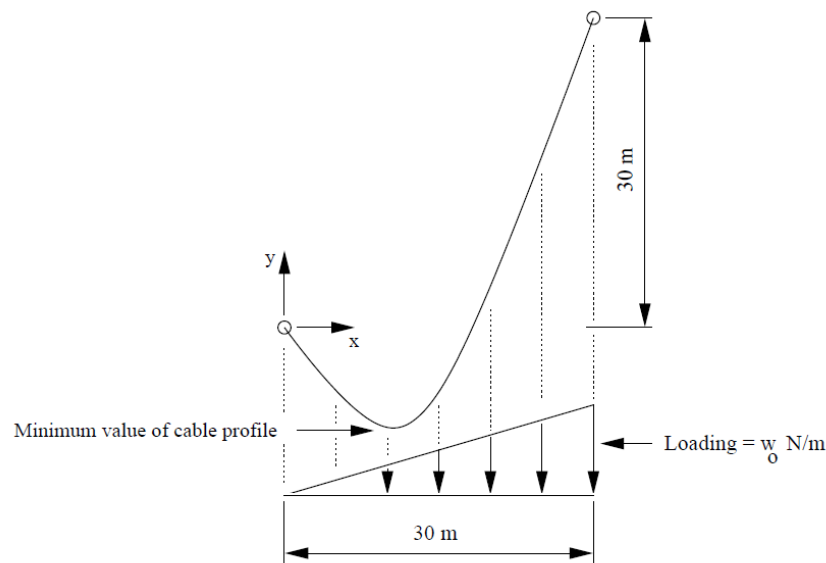

- Prove that the cable profile is governed by the equation:

$$y(x) = \frac{w_0 x^3}{180H} + \left(1 - \frac{5w_0}{H}\right)x$$

- Assume, the minimum value of the cable profile occurs at $x = 10$ m, calculate the reactions at both ends.