



HOMWORK 3

Problem 1: For the three-pin arc structure shown below, the profile is given by $y = \frac{4f}{l^2}x(l-x)$, where $f = 4$ m and $l = 16$ m.

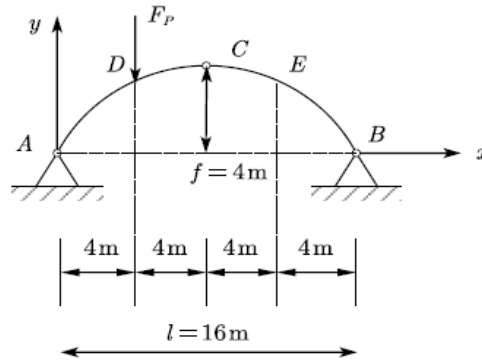

- Calculate the reactions at A and B;
- Calculate the internal forces at point E (i.e. axial force F_N , shear force F_Q and bending moment M);
- Draw the moment diagram.

Problem 2 The cable structure shown below carries a triangular load that is zero at the left-hand support and increases to w_0 N/m at the right-hand support.

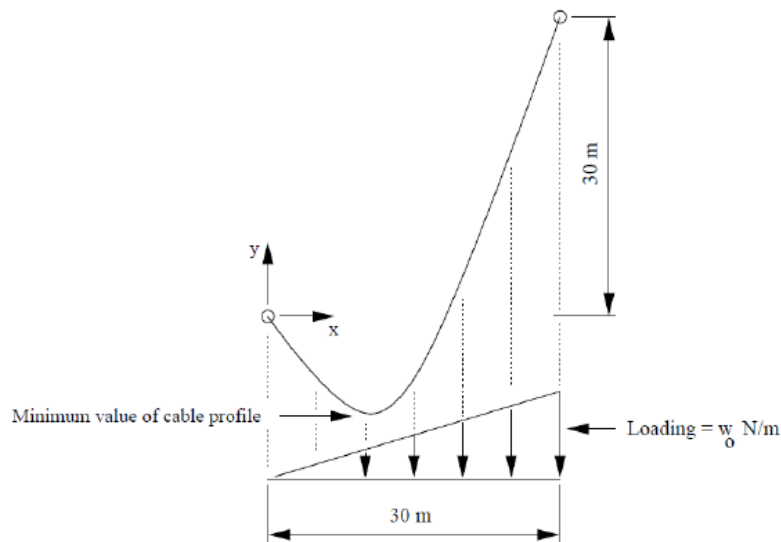

- Prove that the cable profile is governed by the equation:

$$y(x) = \frac{w_0 x^3}{180H} + \left(1 - \frac{5w_0}{H}\right)x$$

- Assume, the minimum value of the cable profile occurs at $x=10$ m, calculate the reactions at both ends.

Problem 3:

- Determine the shear and moment throughout the beam as a function of x
- Draw the shear and moment diagram for the beam

